

**CHE302 LECTURE VI  
DYNAMIC BEHAVIORS OF  
REPRESENTATIVE PROCESSES**


**Professor Dae Ryook Yang**









**Fall 2001**

**Dept. of Chemical and Biological Engineering  
Korea University**

# REPRESENTATIVE TYPES OF RESPONSE

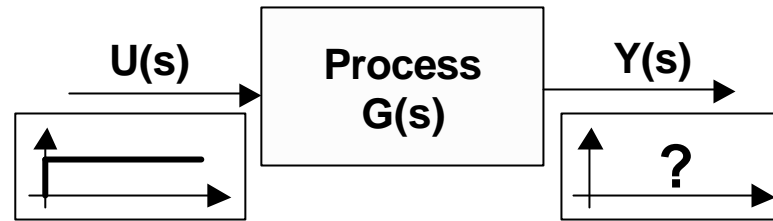- For step inputs



$Y(t)$	Type of Model, $G(s)$
	Nonzero initial slope, no overshoot or nor oscillation, 1 <sup>st</sup> order model
	1 <sup>st</sup> order + Time delay
	Underdamped oscillation, 2 <sup>nd</sup> or higher order
	Overdamped oscillation, 2 <sup>nd</sup> or higher order
	Inverse response, negative (RHP) zeros
	Unstable, no oscillation, real RHP poles
	Unstable, oscillation, complex RHP poles
	Sustained oscillation, pure imaginary poles

# 1<sup>ST</sup> ORDER SYSTEM

- **First-order linear ODE (assume all deviation variables)**

$$t \frac{dy(t)}{dt} = -y(t) + Ku(t) \xrightarrow{\mathcal{L}} (ts + 1)Y(s) = KU(s)$$


- **Transfer function:**  $\frac{Y(s)}{U(s)} = \frac{K}{(ts + 1)}$ 
  - Gain
  - Time constant

- **Step response:**

With  $U(s) = A/s$ ,

$$Y(s) = \frac{KA}{s(ts + 1)} \xrightarrow{\mathcal{L}} y(t) = KA(1 - e^{-t/t})$$


- $y(t) = KA(1 - e^{-t/t}) \approx 0.632KA$
- $KA(1 - e^{-t/t}) \geq 0.99KA \Rightarrow t \approx 4.6t$  (Settling time =  $4t \sim 5t$ )
- $y'(0) = KAe^{-t/t} / t \Big|_{t=0} = KA/t \neq 0$  (Nonzero initial slope)

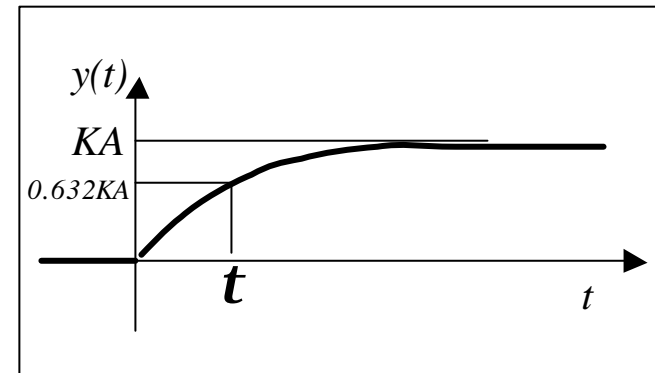

- **Impulse response**

With  $U(s) = A$ ,


$$Y(s) = \frac{KA}{(ts+1)} \xrightarrow{L} y(t) = \frac{KA}{t} e^{-t/t}$$

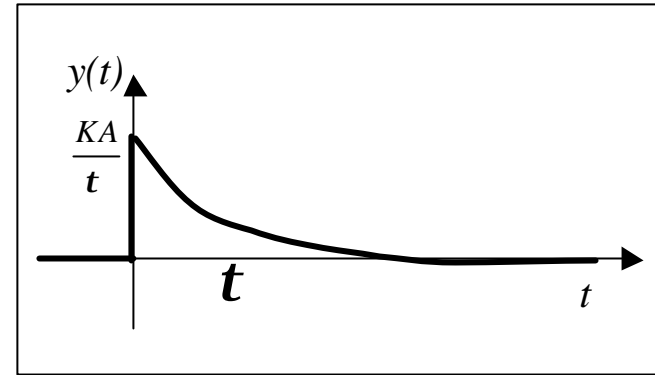

- **Ramp response**

With  $U(s) = a / s^2$ ,

$$Y(s) = \frac{Ka}{s^2(ts+1)} \xrightarrow{L} y(t) = Kat e^{-t/t} + Ka(t-t)$$

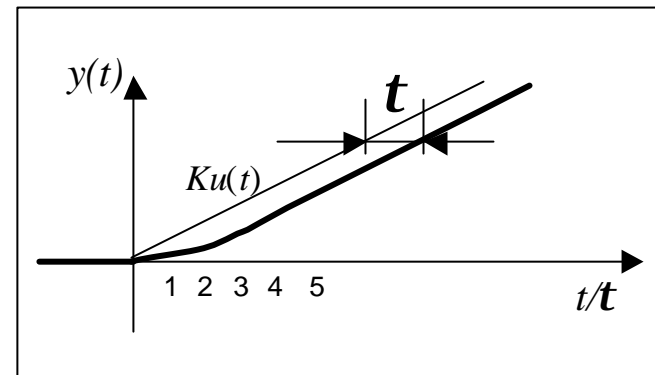


- **Sinusoidal response**

With  $U(s) = L [A \sin wt] = w / (s^2 + w^2)$ ,

$$Y(s) = \frac{KAw}{(ts+1)(s^2+w^2)} \xrightarrow{L}$$

$$y(t) = \frac{KA}{w^2 t^2 + 1} (wt e^{-t/t} - wt \cos wt + \sin wt)$$

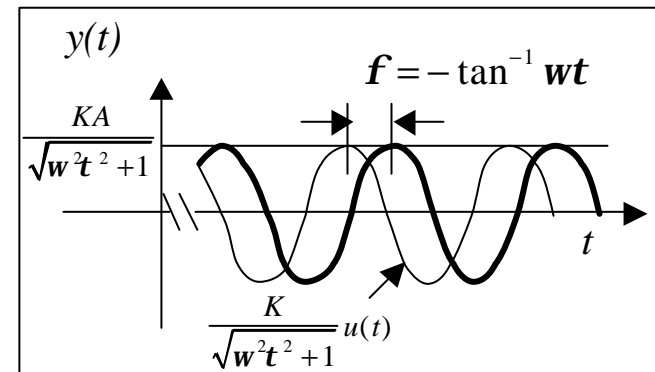

- **Ultimate sinusoidal response** ( $t \rightarrow \infty$ )

$$\begin{aligned}
 y_{\infty}(t) &= \lim_{t \rightarrow \infty} \frac{KA}{w^2 t^2 + 1} (wte^{-t/\tau} - wt \cos wt + \sin wt) \\
 &= \frac{KA}{w^2 t^2 + 1} (-wt \cos wt + \sin wt) \\
 &= \underbrace{\frac{KA}{\sqrt{w^2 t^2 + 1}}}_{\text{Amplitude}} \sin(wt + \underbrace{f}_{\text{Phase angle}}) \quad (f = -\tan^{-1} wt)
 \end{aligned}$$

- The output has the same period of oscillation as the input.
- But the amplitude is attenuated and the phase is shifted.

$$\text{Normalized Amplitude Ratio (AR}_N\text{)} = \frac{1}{\sqrt{w^2 t^2 + 1}} < 1 \quad \text{Phase angle} = -\tan^{-1} wt$$

- High frequency input will be attenuated more and phase is shifted more.

# BODE PLOT FOR 1<sup>ST</sup> ORDER SYSTEM

- AR plot asymptote

$$AR_N(\omega \rightarrow 0) = \lim_{\omega \rightarrow 0} \frac{1}{\sqrt{\omega^2 t^2 + 1}} = 1$$



$$AR_N(\omega \rightarrow \infty) = \lim_{\omega \rightarrow \infty} \frac{1}{\sqrt{\omega^2 t^2 + 1}} = \frac{1}{\omega t}$$

- Phase plot asymptote

$$f(\omega \rightarrow 0) = -\lim_{\omega \rightarrow 0} \tan^{-1} \omega t = 0^\circ$$

$$f(\omega \rightarrow \infty) = -\lim_{\omega \rightarrow \infty} \tan^{-1} \omega t = -90^\circ$$

- It is also called “low-pass filter”

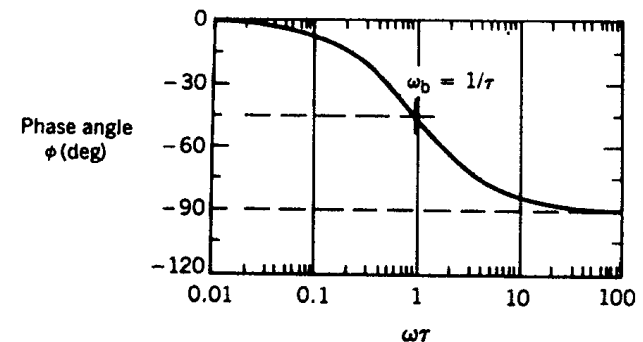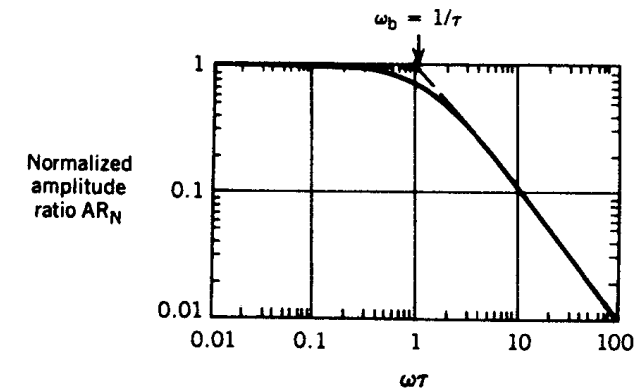

# 1<sup>ST</sup> ORDER PROCESSES

- **Continuous Stirred Tank**



$$V \frac{dc_A}{dt} = qc_{Ai} - qc_A$$

$$\frac{C_A(s)}{C_{Ai}(s)} = \frac{q}{Vs + q} = \frac{1}{(V/q)s + 1}$$

– With constant heat capacity and density

$$rVC_p \frac{d(T - T_{ref})}{dt} = rqC_p (T_0 - T_{ref}) - rqC_p (T - T_{ref})$$

$$\frac{T(s)}{T_0(s)} = \frac{q}{Vs + q} = \frac{1}{(V/q)s + 1}$$

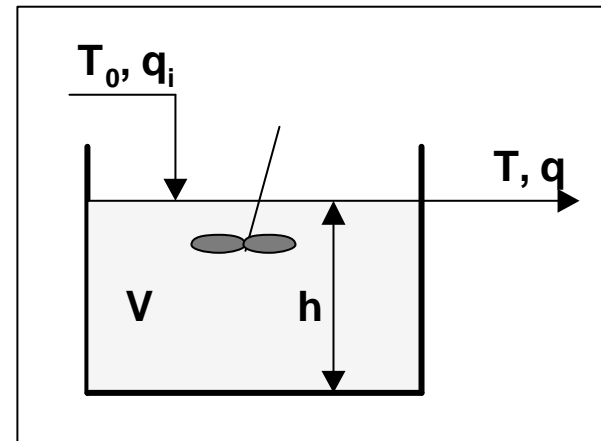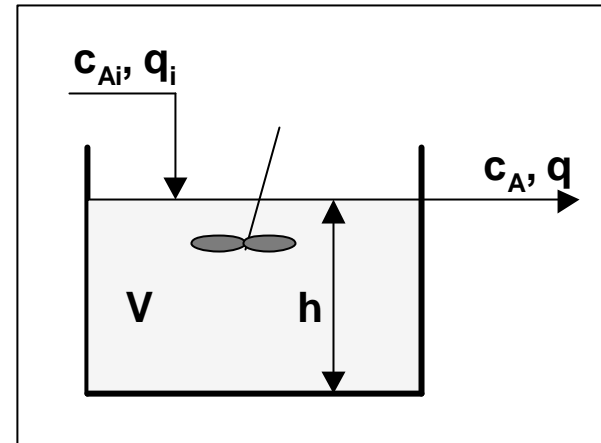

# INTEGRATING SYSTEM


- $\frac{dy(t)}{dt} = Ku(t) \xrightarrow{\mathcal{L}} sY(s) = KU(s)$

- **Transfer Function:**  $\frac{Y(s)}{U(s)} = \frac{K}{s}$

- **Step Response**

With  $U(s) = 1/s$ ,

$$Y(s) = \frac{K}{s^2} \xrightarrow{\mathcal{L}} y(t) = Kt$$

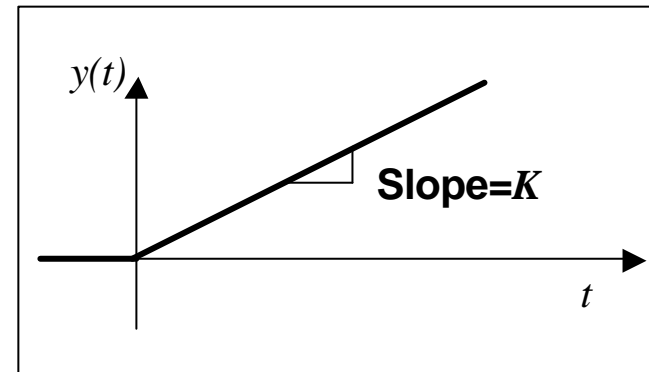

- **The output is an integration of input.**
- **Impulse response is a step function.**
- **Non self-regulating system**




# INTEGRATING PROCESSES

- **Storage tank with constant outlet flow**
  - Outlet flow is pumped out by a constant-speed, constant-volume pump
  - Outlet flow is not a function of head.

$$A \frac{dh}{dt} = q_i - q$$

$$\frac{H(s)}{Q_i(s)} = \frac{1}{As}$$

$$\frac{H(s)}{Q(s)} = -\frac{1}{As}$$

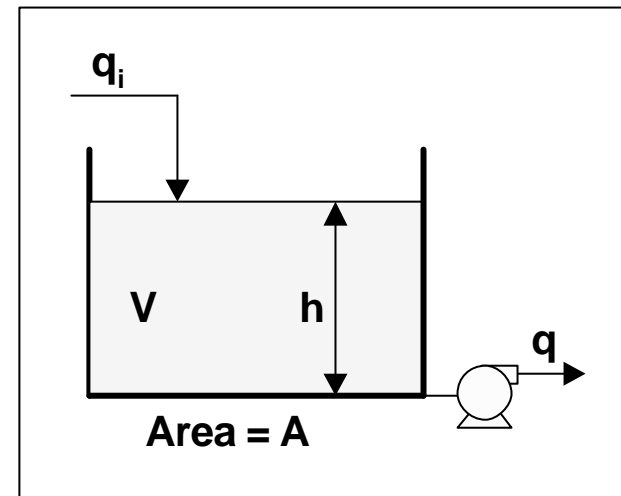

# 2<sup>ND</sup> ORDER SYSTEM

- **2<sup>nd</sup> order linear ODE**

$$t^2 \frac{d^2 y(t)}{dt^2} + 2zt \frac{dy(t)}{dt} + y(t) = Ku(t) \xrightarrow{L} (t^2 s^2 + 2zt s + 1)Y(s) = KU(s)$$

- **Transfer Function:**

$$\frac{Y(s)}{U(s)} = \frac{K}{(t^2 s^2 + 2zt s + 1)}$$

→ Gain  
→ Time constant  
→ Damping Coefficient

- **Step response**

- **Varies with the type of roots of denominator of the TF.**
  - **Real part of roots should be negative for stability:  $z \geq 0$**
  - **Two distinct real roots (  $z > 1$  ): overdamped (no oscillation)**
  - **Double root (  $z = 1$  ): critically damped (no oscillation)**
  - **Complex roots (  $0 \leq z < 1$  ): underdamped (oscillation)**

- **Case I** ( $z > 1$ ) with  $U(s)=1/s$

$$Y(s) = \frac{K}{s(t^2 s^2 + 2zt s + 1)} = \frac{K}{s(t_1 s + 1)(t_2 s + 1)} \xrightarrow{L} y(t) = K \left( 1 - \frac{t_1 e^{-t/t_1} - t_2 e^{-t/t_2}}{(t_1 - t_2)} \right)$$



- **Case II** ( $z = 1$ )

$$Y(s) = \frac{K}{s(t^2 s^2 + 2t s + 1)} = \frac{K}{s(t s + 1)^2} \xrightarrow{L} y(t) = K \left[ 1 - (1 + t/t) e^{-t/t} \right]$$

- **Case III** ( $0 \leq z < 1$ )

$$Y(s) = \frac{K}{s(t^2 s^2 + 2t s + 1)} \xrightarrow{L} y(t) = K \left[ 1 - e^{-z t/t} \left\{ \cos at + \frac{z}{at} \sin at \right\} \right] \quad \left( a = \frac{\sqrt{1-z^2}}{t} \right)$$

Natural frequency  $\nearrow$

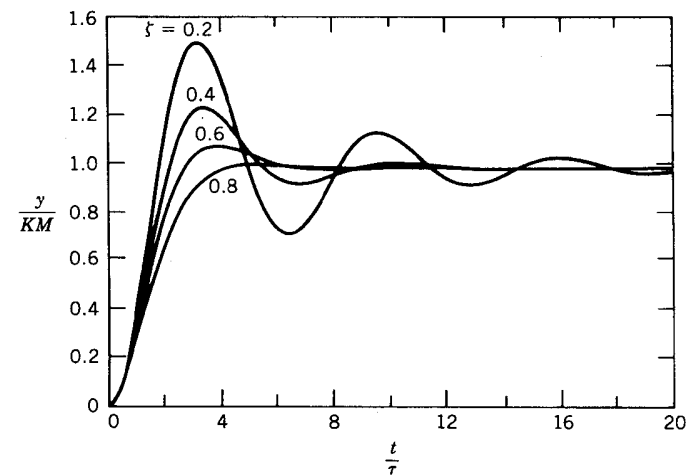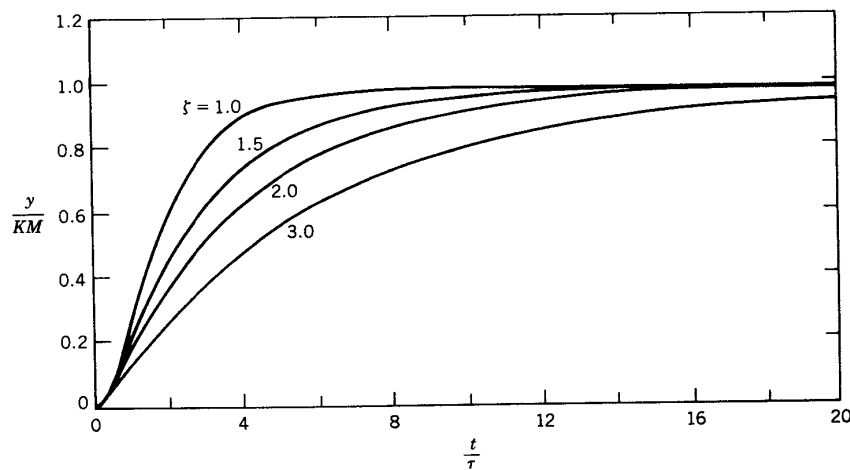

- **Ultimate sinusoidal response**

With  $U(s) = L[A \sin \omega t]$ ,

$$Y(s) = \frac{KA\omega}{(t^2s^2 + ts + 1)(s^2 + \omega^2)} \xrightarrow{L}$$

$$y(t) = \frac{KA}{\sqrt{(1 - \omega^2 t^2)^2 + (2z\omega t)^2}} \sin(\omega t + f) \quad (f = -\tan^{-1} \frac{2z\omega t}{1 - \omega^2 t^2})$$

- **Other method to find ultimate sinusoidal response**

For  $(s + a + j\omega)$ ,  $y(t)$  has  $e^{-(a+j\omega)t}$  and it becomes  $e^{-j\omega t}$  as  $t \rightarrow \infty$  ( $a > 0$ ).

$$G(s) = \frac{K}{(t^2s^2 + 2zts + 1)} \xrightarrow{s \rightarrow j\omega} G(j\omega) = \frac{K}{(1 - t^2\omega^2) + 2jz\omega t}$$

$$AR = |G(j\omega)| = \left| \frac{K}{(1 - t^2\omega^2) + jz\omega t} \right| = \frac{K}{\sqrt{(1 - \omega^2 t^2)^2 + (2z\omega t)^2}}$$

$$f = \angle G(j\omega) = \tan^{-1} \frac{\text{Im}(G(j\omega))}{\text{Re}(G(j\omega))} = -\tan^{-1} \frac{2z\omega t}{1 - \omega^2 t^2}$$

# BODE PLOT FOR 2<sup>ND</sup> ORDER SYSTEM

- **AR plot**  $AR_N(w \rightarrow \infty) = \lim_{w \rightarrow \infty} \frac{1}{\sqrt{(1-w^2t^2)^2 + (2zwt)^2}} = \frac{1}{(wt)^2}$
- **Phase plot**  $f(w \rightarrow \infty) = -\lim_{w \rightarrow \infty} \tan^{-1} \frac{2zwt}{1-w^2t^2} = \lim_{w \rightarrow \infty} \tan^{-1} \frac{-2z}{-wt} = -180^\circ$





- **Resonance**

$$d(AR_N) / dw = 0$$

$$W_{\max} = \frac{\sqrt{1-2z^2}}{t}$$

for  $0 < z < 0.707$

The amplitude of output oscillation is bigger than that of input when the resonance occurs .

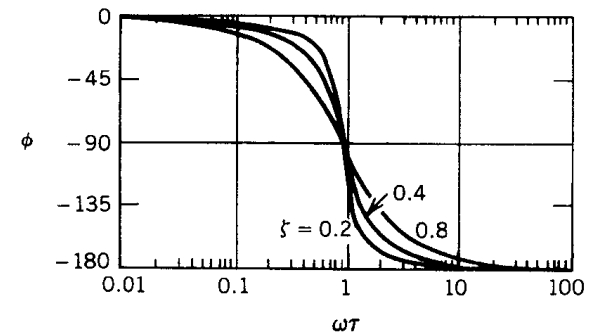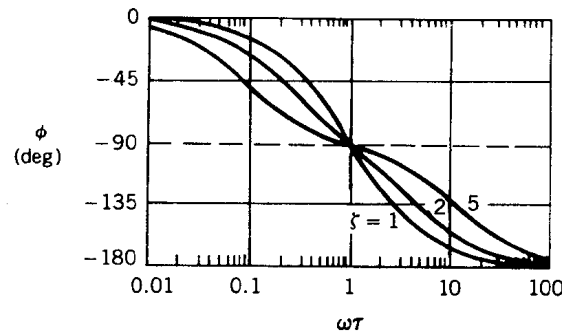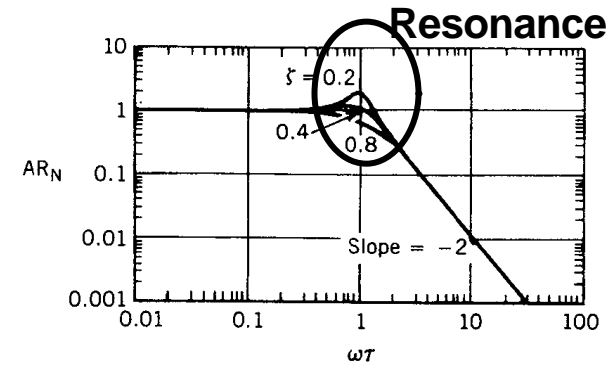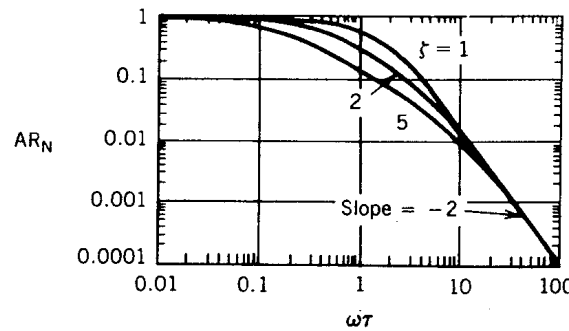

# 1ST ORDER VS. 2ND ORDER (OVERDAMPED)

- **Initial slope of step response**

$$\text{1st order: } y'(0) = \lim_{s \rightarrow \infty} \{s^2 Y(s)\} = \lim_{s \rightarrow \infty} \frac{KAs}{t s + 1} = \frac{KA}{t} \neq 0$$

$$\text{2nd order: } y'(0) = \lim_{s \rightarrow \infty} \{s^2 Y(s)\} = \lim_{s \rightarrow \infty} \frac{KAs}{t^2 s + 2zt s + 1} = 0$$

- **Shape of the curve (Convexity)**

$$\text{1st order: } y''(t) = -Ke^{-t/t} < 0 \quad (\text{For } K > 0) \Rightarrow \text{No inflection}$$

$$\text{2nd order: } y''(t) = -\frac{KA}{t_1 - t_2} \left( \frac{e^{-t/t_1}}{t_1} - \frac{e^{-t/t_2}}{t_2} \right)$$

$$(+ \rightarrow - \text{ as } t \uparrow) \Rightarrow \text{Inflection}$$

# CHARACTERIZATION OF SECOND ORDER SYSTEM

- **2<sup>nd</sup> order Underdamped response**

- Rise time ( $t_r$ )

$$t_r = t (np - \cos^{-1} z) / \sqrt{1-z^2} \quad (n=1)$$

- Time to 1<sup>st</sup> peak ( $t_p$ )

$$t_p = tp / \sqrt{1-z^2}$$

- Settling time ( $t_s$ )

$$t_s \approx -t / z \ln(0.05)$$


- Overshoot (OS)

$$OS = a/b = \exp\left(-pz / \sqrt{1-z^2}\right)$$

- Decay ratio (DR): a function of damping coefficient only!

$$DR = c/a = (OS)^2 = \exp\left(-2pz / \sqrt{1-z^2}\right)$$

- Period of oscillation ( $P$ )  $P = 2pt / \sqrt{1-z^2}$

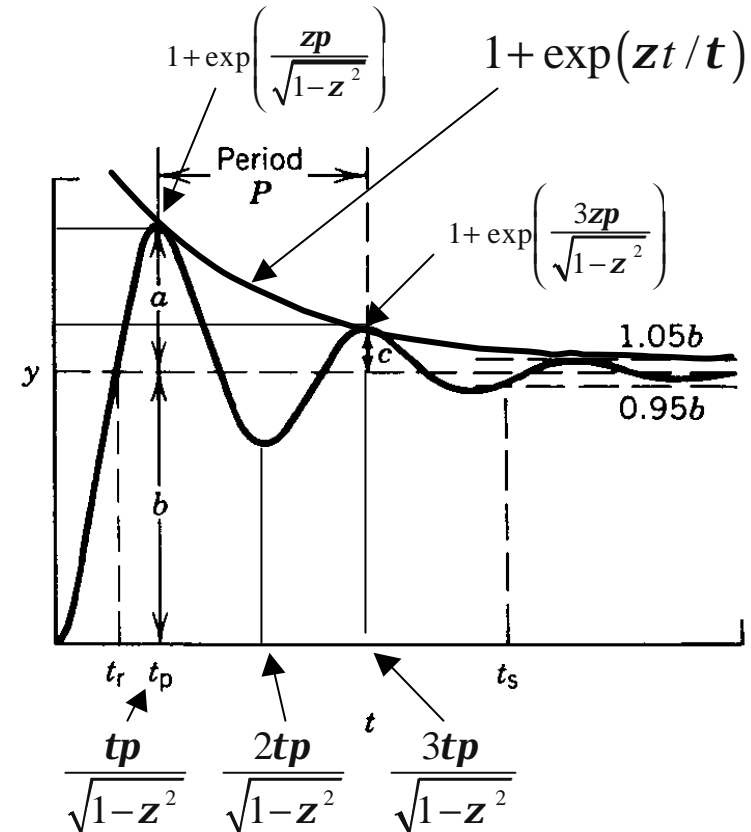


# 2<sup>ND</sup> ORDER PROCESSES

- **Two tanks in series**

- If  $v_1=v_2$ , critically damped.
- Or, overdamped (no oscillation)

$$\frac{C_A(s)}{C_{Ai}(s)} = \frac{1}{((V_1/q)s+1)((V_2/q)s+1)}$$

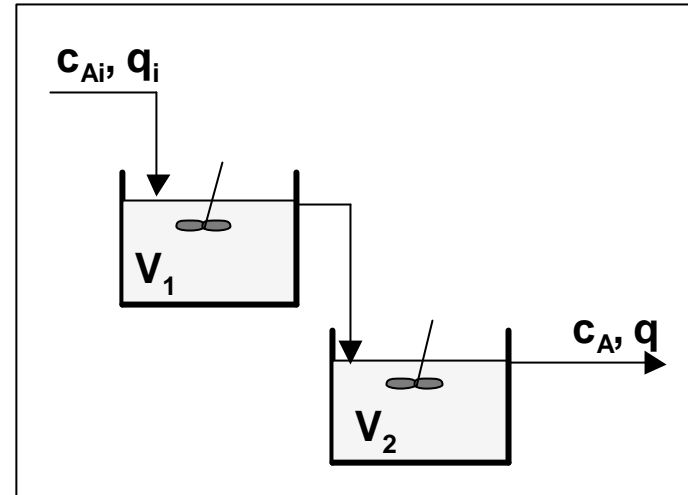

- **Spring-dashpot (shock absorber)**


- By force balance

$$(mg + f(t)) - ky - cv = ma$$

$$my'' = -ky - cy' + (mg + f(t))$$

$$\left(\sqrt{\frac{m}{k}}\right)^2 y'' + 2\sqrt{\frac{c^2}{4mk}} \sqrt{\frac{m}{k}} y' + y = \tilde{f}(t)$$

$\zeta$  (can be <1: underdamped)

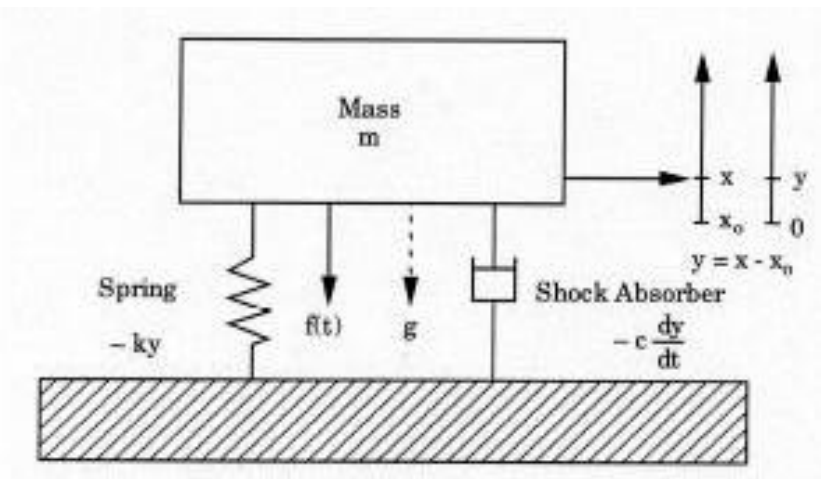



# Underdamped Processes

- **Many examples can be found in mechanical and electrical system.**
- **Among chemical processes, open-loop underdamped process is quite rare.**
- **However, when the processes are controlled, the responses are usually underdamped.**
- **Depending on the controller tuning, the shape of response will be decided.**
- **Slight overshoot results short rise time and often more desirable.**
- **Excessive overshoot may results long-lasting oscillation.**

# POLES AND ZEROS



$$G(s) = \frac{N(s)}{D(s)} = \frac{K(b_m s^m + b_{m-1} s^{m-1} + \dots + b_1 s + 1)}{(a_n s^n + a_{n-1} s^{n-1} + \dots + a_1 s + 1)}$$

- **Poles ( $D(s)=0$ )**
  - Where a transfer function cannot be defined.
  - Roots of the denominator of the transfer function
  - Modes of the response
  - Decide the stability
- **Zero ( $N(s)=0$ )**
  - Where a transfer function becomes zero.
  - Roots of the numerator of the transfer function
  - Decide weightings for each mode of response
  - Decide the size of overshoot or inverse response
- **They can be real or complex**

- **Real pole from  $(ts + 1)$**

$$s = -\frac{1}{t}$$

– **Mode:**  $e^{-t/t}$

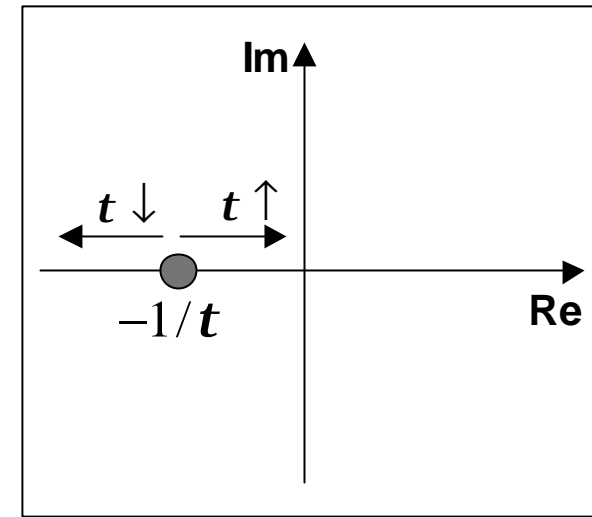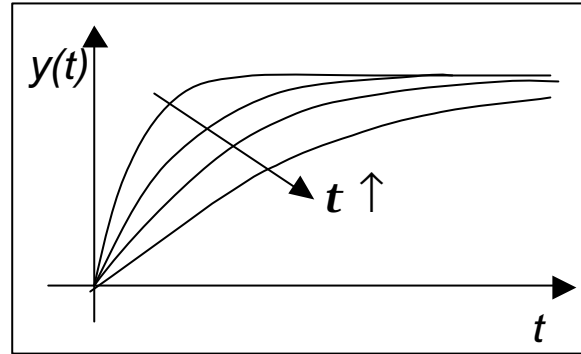


- **If the pole is at the origin, it becomes “integrating pole.”**
- **If the pole is in RHP, the response increases exponentially.**

- **Complex pole from  $(t^2s^2 + 2zts + 1)$  ( $-1 < z < 1$ )**

$$s = -\frac{z}{t} \pm j \frac{\sqrt{1-z^2}}{t} = -a \pm jb$$

$$|s| = \sqrt{\frac{z^2 + 1 - z^2}{t^2}} = \frac{1}{t} \quad (\text{function of } t \text{ only})$$

$$\angle s = \pm \tan^{-1} \frac{\sqrt{1-z^2}}{z} \quad (\text{function of } z \text{ only})$$

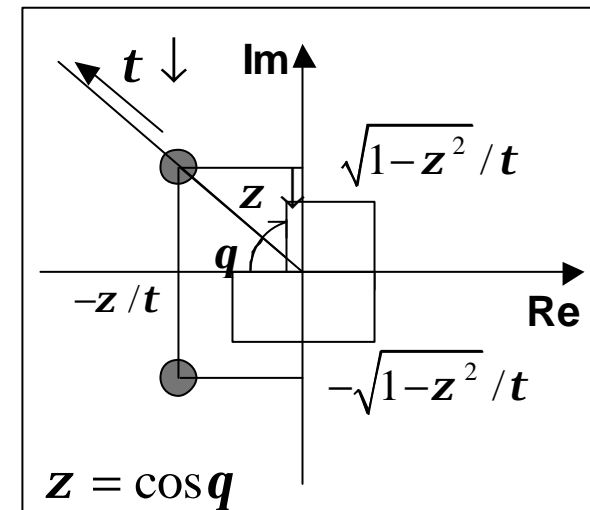

- **Modes:**  $e^{-at \pm jbt} = e^{-at} (\cos bt \pm j \sin bt)$   
 $= e^{-z t/t} \left( \cos \frac{\sqrt{1-z^2}}{t} t \pm j \sin \frac{\sqrt{1-z^2}}{t} t \right)$

- Assume  $t$  is positive.
- If  $z < 0$ , the exponential part will grow as  $t$  increases: **unstable**
- If  $z > 0$ , the exponential part will shrink as  $t$  increases: **stable**
- If  $z = 0$ , the roots are pure imaginary: **sustained oscillation**

- **Effect of zero**

$$G(s) = \frac{N(s)}{(s + p_1) \cdots (s + p_n)} = w_1 \frac{1}{(s + p_1)} + \cdots + w_n \frac{1}{(s + p_n)}$$

- The effects on weighting factors are not obvious, but it is clear that the numerator (zeros) will change the weighting factors.

# EFFECTS OF ZEROS

- **Lead-lag module**

$$G(s) = \frac{N(s)}{D(s)} = \frac{K(t_a s + 1)}{(t_1 s + 1)} \begin{array}{l} \longrightarrow \text{Lead} \\ \longrightarrow \text{Lag} \end{array}$$

– Depending on the location of zero

$$Y(s) = \frac{KM(t_a s + 1)}{s(t_1 s + 1)} = KM \left\{ \frac{1}{s} + \frac{t_a - t_1}{t_1 s + 1} \right\} \quad y(t) = KM \left[ 1 - \left( 1 - \frac{t_a}{t_1} \right) e^{-t/t_1} \right]$$

(a)  $t_a > t_1 > 0$


The lead dominates the lag.

(b)  $0 \leq t_a < t_1$

The lag dominates the lead.

(c)  $0 > t_a$

Inverse response

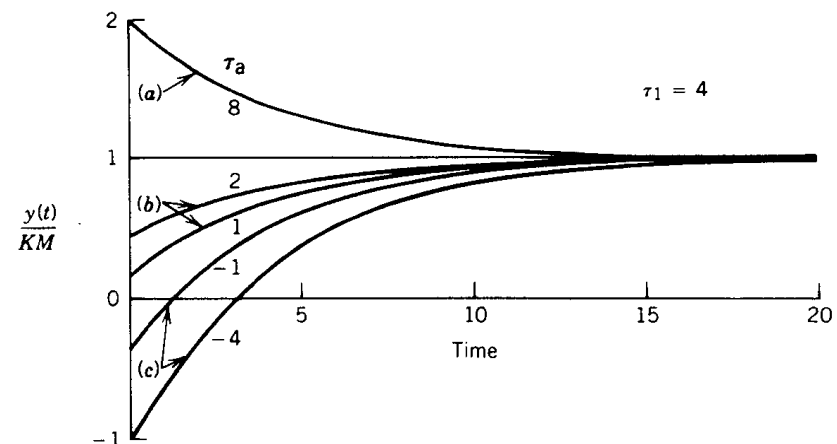

- **Overdamped 2<sup>nd</sup> order+single zero system**

$$G(s) = \frac{N(s)}{D(s)} = \frac{K(t_a s + 1)}{(t_1 s + 1)(t_2 s + 1)}$$

$$Y(s) = \frac{KM(t_a s + 1)}{s(t_1 s + 1)(t_2 s + 1)} = KM \left\{ \frac{1}{s} + \frac{t_1(t_a - t_1)}{t_1 - t_2} \frac{1}{t_1 s + 1} + \frac{t_2(t_a - t_2)}{t_2 - t_1} \frac{1}{t_2 s + 1} \right\}$$

$$y(t) = KM \left[ 1 + \frac{t_a - t_1}{t_1 - t_2} e^{-t/t_1} + \frac{t_a - t_2}{t_2 - t_1} e^{-t/t_2} \right]$$

(a)  $t_a > t_1 > 0$  (assume  $t_1 > t_2$ )


**The lead dominates the lags.**

(b)  $0 < t_a \leq t_1$

**The lags dominate the lead.**

(c)  $0 > t_a$

**Inverse response**

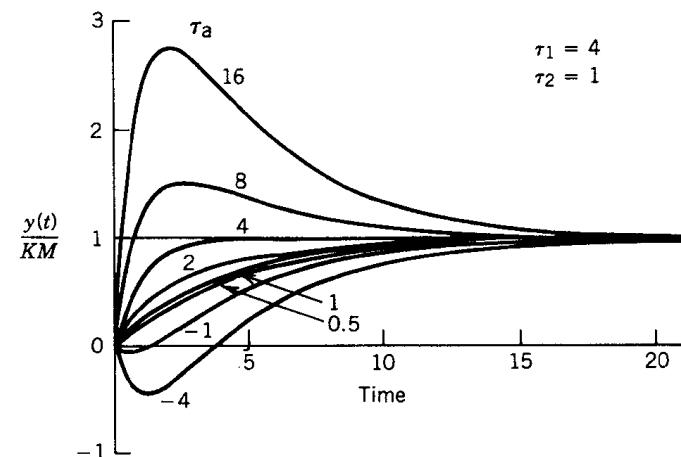


- Other interpretation




$$G(s) = \frac{K(t_a s + 1)}{(t_1 s + 1)(t_2 s + 1)} = \frac{K_1}{(t_1 s + 1)} + \frac{K_2}{(t_2 s + 1)}$$

$$K_1 = \frac{K(t_a s + 1)}{(t_2 s + 1)} \Big|_{s=-1/t_1} = \frac{K(t_1 - t_a)}{(t_1 - t_2)}$$


$$K_2 = \frac{K(t_a s + 1)}{(t_1 s + 1)} \Big|_{s=-1/t_2} = \frac{K(t_a - t_2)}{(t_1 - t_2)}$$

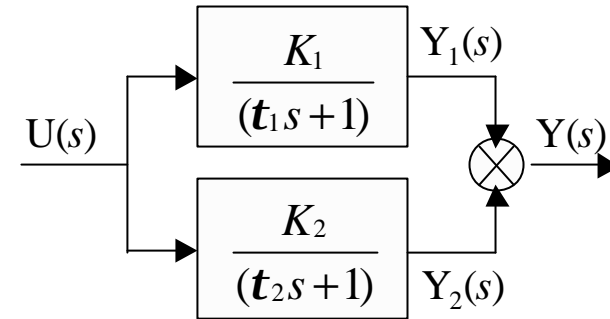

– Since  $t_1 > t_2$ , 1 is slow dynamics and 2 is fast dynamics.

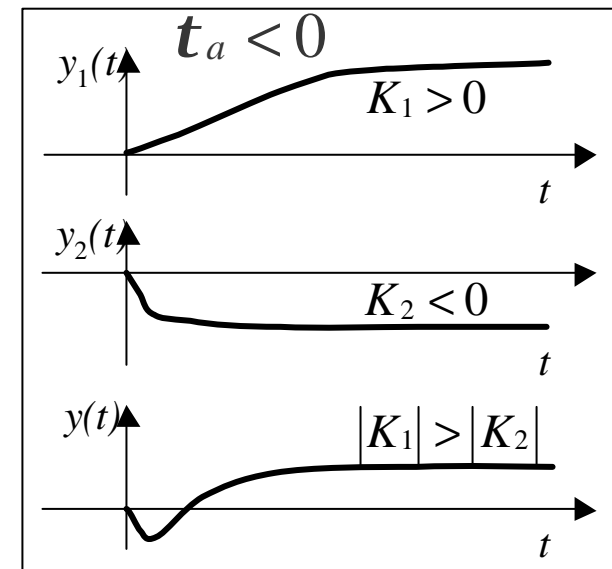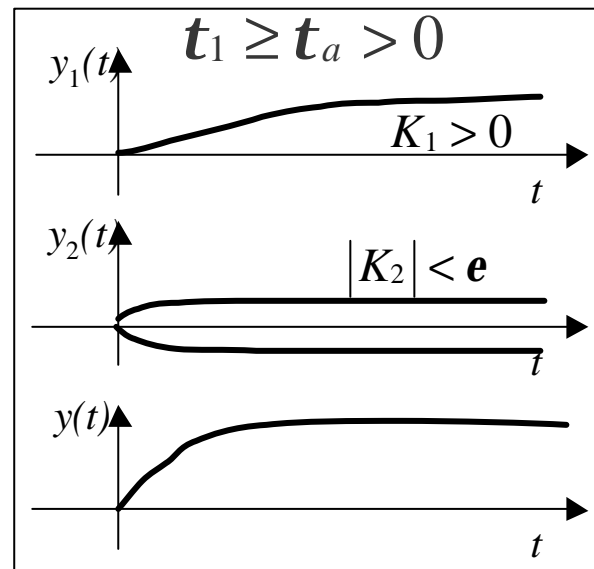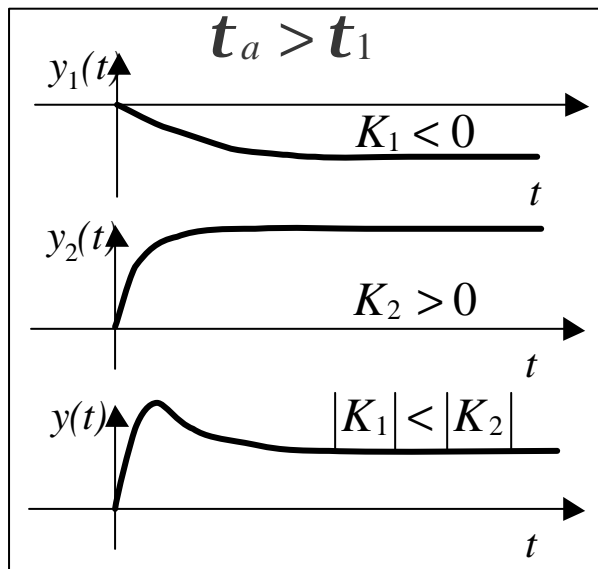

# EFFECTS OF POLE LOCATION

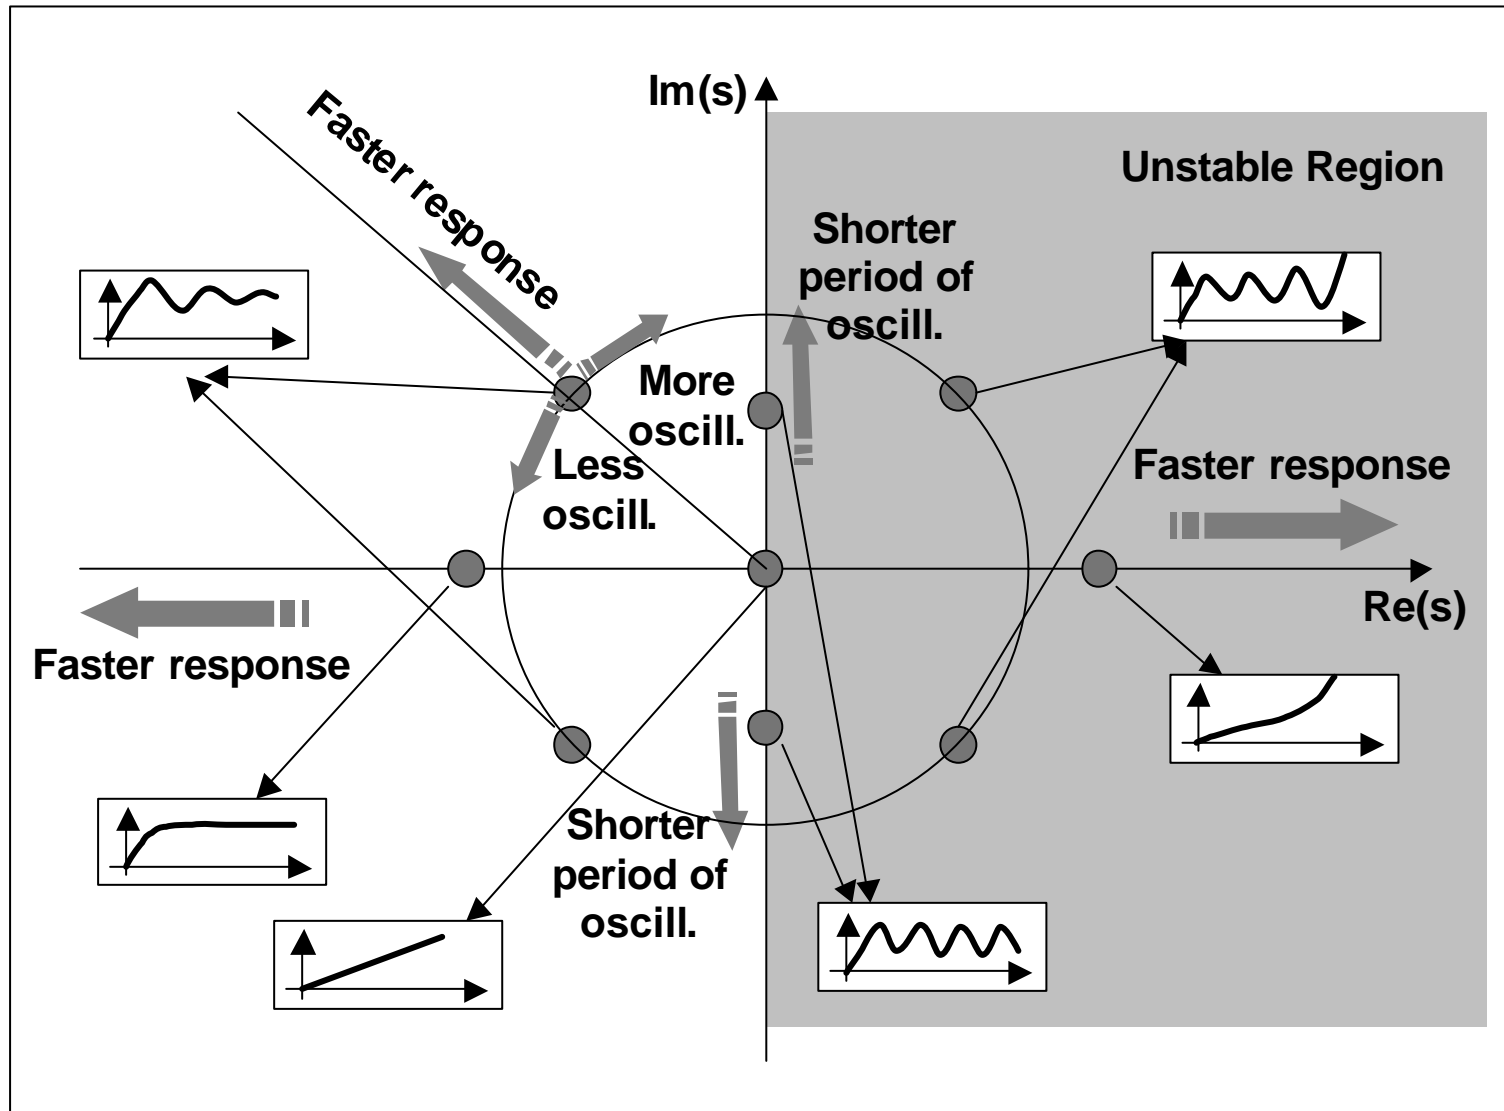



# EFFECTS OF ZERO LOCATION

